


Convex ring nail

Convex ring nail with diamond point

Application: The ring nail is used whenever the firmest connections are required. In comparison with conventional machine nails it has a four-fold extraction value by the same insertion depth.

Type	d / d1 shaft Ø	L Length	D Head Ø	T Division n	Weight/ 1000 pcs	Art.-No.
RND	5,0/5,3	130	11,0	1,5/1,8	20,62 kg	r50130
RND	3,6/4,2	90	9,0	0,8/1,3	7,40 kg	r3690
RND	3,6/4,2	80	9,0	0,8/1,3	6,60 kg	r3680
RND	3,6/4,2	70	9,0	0,8/1,3	5,75 kg	r3670
RND	3,6/4,2	60	9,0	0,8/1,3	4,92 kg	r3660
RND	3,6/4,2	38	9,0	0,8/1,3	3,30 kg	r3638
RND	3,4/3,7	90	8,0	0,8/1,3	6,50 kg	r3490
RND	3,4/3,7	85	8,0	0,8/1,3	6,14 kg	r3485
RND	3,4/3,7	80	8,0	0,8/1,3	5,77 kg	r3480
RND	3,4/3,7	75	8,0	0,8/1,3	5,42 kg	r3475
RND	3,4/3,7	70	8,0	0,8/1,3	5,05 kg	r3470
RND	3,4/3,7	65	8,0	0,8/1,3	4,69 kg	r3465
RND	3,4/3,7	60	8,0	0,8/1,3	4,33 kg	r3460
RND	3,3/3,6	85	8,0	0,8/1,3	5,95 kg	r3385
RND	3,3/3,6	75	8,0	0,8/1,3	5,25 kg	r3375
RND	3,3/3,6	65	8,0	0,8/1,3	4,55 kg	r3365
RND	3,1/3,4	90	7,0	0,8/1,3	5,55 kg	r3190
RND	3,1/3,4	85	7,0	0,8/1,3	5,23 kg	r3185
RND	3,1/3,4	80	7,0	0,8/1,3	4,93 kg	r3180
RND	3,1/3,4	75	7,0	0,8/1,3	4,60 kg	r3175
RND	3,1/3,4	70	7,0	0,8/1,3	4,29 kg	r3170
RND	3,1/3,4	65	7,0	0,8/1,3	3,98 kg	r3165
RND	3,1/3,4	60	7,0	0,8/1,3	3,68 kg	r3160
RND	3,1/3,4	55	7,0	0,8/1,3	3,35 kg	r3155
RND	3,1/3,4	50	7,0	0,8/1,3	3,05 kg	r3150
RND	3,1/3,4	45	7,0	0,8/1,3	2,74 kg	r3145
RND	3,1/3,4	40	7,0	0,8/1,3	2,43 kg	r3140
RND	3,1/3,4	38	7,0	0,8/1,3	2,31 kg	r3138
RND	3,1/3,4	35	7,0	0,8/1,3	2,07 kg	r3135
RND	3,1/3,4	32	7,0	0,8/1,3	1,97 kg	r3132

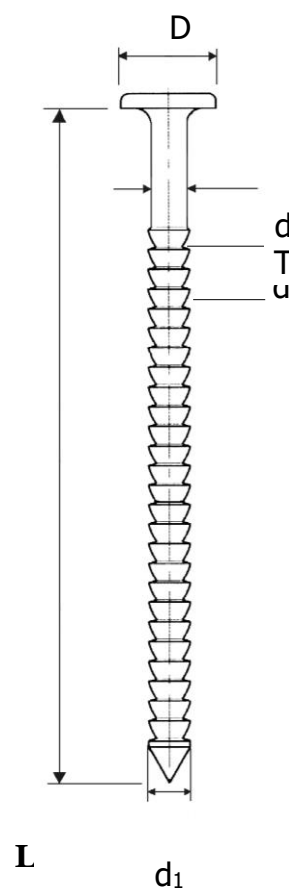

On request we also manufacture other dimensions and types of heads.