


## Clinch point nail

### Smooth nail with a clinch point

Application: The clinch point nail is used for the connection of cross and top planks to machines without moveable clinch plates. Via the unilaterally cut tip it is easy to bend the nail on the metal base.

Type	d shaft Ø	L Length	D Head Ø	Weight/ 1000 pcs	Art.-No.
NN	2,8	54	7,0	2,63 kg	n2854
NN	2,8	50	7,0	2,44 kg	n2850
NN	2,8	48	7,0	2,33 kg	n2848
NN	2,8	45	7,0	2,18 kg	n2845
NN	2,8	40	7,0	1,95 kg	n2840
NN	2,8	35	7,0	1,71 kg	n2835
NN	2,8	30	7,0	1,48 kg	n2835
NN	2,8	27	7,0	1,27 kg	n2835
NN	2,8	25	7,0	1,25 kg	n2835
NN	2,5	55	6,3	2,20 kg	n2555
NN	2,5	52	6,3	2,08 kg	n2552
NN	2,5	50	6,3	2,00 kg	n2550
NN	2,5	48	6,3	1,92 kg	n2548
NN	2,5	45	6,3	1,80 kg	n2545
NN	2,5	43	6,3	1,72 kg	n2543
NN	2,5	42	6,3	1,68 kg	n2542
NN	2,5	40	6,3	1,60 kg	n2540
NN	2,5	38	6,3	1,52 kg	n2538
NN	2,5	35	6,3	1,40 kg	n2535
NN	2,5	30	6,3	1,20 kg	n2530
NN	2,5	25	6,3	1,00 kg	n2525
NN	2,3	45	6,0	1,49 kg	n2345
NN	2,3	40	6,0	1,32 kg	n2340
NN	2,3	35	6,0	1,16 kg	n2335
NN	2,3	30	6,0	0,99 kg	n2330

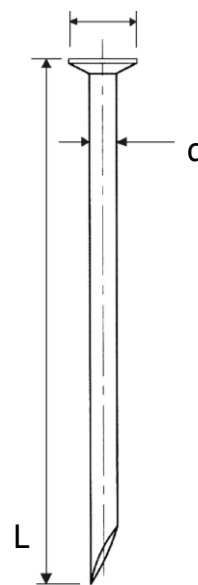

On request we also supply other dimensions and types of head.